



Cordless LED Flashlight DML807




2W Top LED

with light-diffusing reflector and transparent lens



Convenient metal hook

- can be retracted and stored behind the light head.
- swivels full 360 degrees.

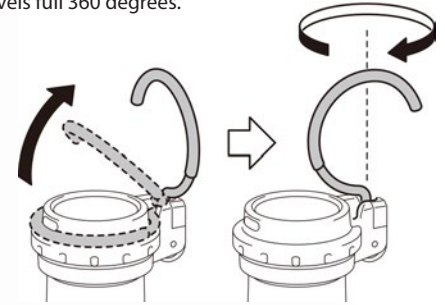

Light diffusing plastic

(color: milky white)



Ring for Strap

Strap with hook (Optional accessory for DML184) can be attached.




3-stage
brightness
switch

0.5W x 20 LEDs

- for wide and bright illumination
- 360 degree illumination (5 LEDs in a vertical row x 4 sides)

Half brightness

with 10 LEDs (5 LEDs x 2 sides) on



Top view



Full brightness

with 20 LEDs (5 LEDs x 4 sides) on



Top view



Battery and charger are sold separately.

USB output port (Type A, 5V, 2.1A)

with rubber cap to prevent dust and debris from entering



Powered by All Makita LXT 14.4/18V Li-ion batteries

*with Battery fuel gauge



- *BL1860B: 6.0Ah
- *BL1850B: 5.0Ah
- *BL1840B: 4.0Ah
- *BL1830B: 3.0Ah
- *BL1820B: 2.0Ah
- BL1815N: 1.5Ah



- *BL1460B: 6.0Ah
- BL1450B: 5.0Ah
- BL1440B: 4.0Ah
- *BL1430B: 3.0Ah

BL1850B

BL1415N: 1.5Ah

Fast Charger

DC18RC



Charger

DC18SD



Cordless LED Flashlight DML807

Continuous use (hours)	Main : 20LEDs-11 (BL1850), 6.5 (BL1440), 10LEDs-23 (BL1850), 13 (BL1440) Sub : 1 X 2W LED -36 (BL1850), 21 (BL1440)
Sub light source (on top side)	Illuminance: 1,900 lx* luminous flux: 130 lm Type: 1 x 2W LED
Main light source (on bar side)	Illuminance (Full brightness): 340lx* Illuminance (Half brightness): 310lx* Luminous flux (Full brightness): 710lm Luminous flux (Half brightness): 340lm Type: 20 x 0.5W LED Service life: 50,000 or more hours
Dimensions (L x W x H)	414x79x155mm (16-1/4"x3-1/8"x6-1/8")
Net weight	0.72kg (1.6lbs) with BL1415N 1.0kg (2.3lbs) with BL1850B

Battery and charger are sold separately. *at 0.5m from the light source weight according to EPTA-Procedure 01/ver.2.1

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan