



Cordless Demolition Hammer HM002G



Adapted for SDS-MAX bits



40V^{max} LITHIUM + **40V^{max} LITHIUM**



Cordless / More powerful than corded tools



Impact energy
[EPTA-Procedure 05/2009]
20.9
Joule



40V^{Li-ion} max + 40V^{Li-ion} max

XGT X2
80V^{max}



High power



Work amount (for 5 minutes)

Concrete with compressive strength of 40N/mm²
BL4040 x2 (on a full battery charge)

Impact energy
[EPTA-Procedure 05/2009]

20.9
Joule

HM002G	115
AC tools	100

small

large

Anti-Vibration Technology

Vibration level at main handle

8.0m/s²



AVT

Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.

Vibration absorbing housing isolates handle and motor.

Chipped concrete and measured the amount of concrete removed

Concrete with compressive strength of 40N/mm²
BL4040 x2 (on a full battery charge)

about **13** min

XPT
eXtreme
Protection
Technology



r and Low vibration



BL
MOTOR

High power
brushless motor

SOFT
NO LOAD


Suppression of motor speed during no-load



AWS

Auto-start Wireless System

Connects to compatible vacuum cleaner with Bluetooth.
The vacuum cleaner automatically runs while the switch is on.

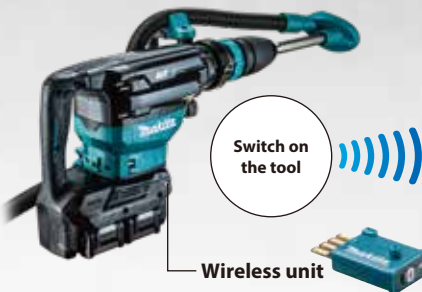


Bluetooth



 Adapted for SDS-MAX bits

12 bit angle settings

Twin LED job lights



Variable speed control dial



Slide lever for trigger lock-on / lock-off

Trigger lock-on/lock-off can be set simply by pushing the slide lever:

- For lock-on of the trigger, pull and hold the trigger, then push the slide lever.
- For lock-off of the trigger, push the slide lever without pulling the trigger.

40V^{Li-ion} max + 40V^{Li-ion} max

XGT X2
80V^{max}

40Vmax
series
movie



40Vmax
mechanism
movie



This movie was filmed in Japan. Models and specs may vary by country.

Cordless Hammer Series



Demolition Hammer
HM002G



Rotary Hammer
HR006G



XGT
40V^{Li-ion} max

Demolition Hammer
HM001G

Rotary Hammer
HR005G

Combination Hammer
HR001G / HR002G / HR003G / HR004G



Accessories

Dust extractor attachment set

without Vacuum hose set

Part No. 199143-4

with Vacuum hose set

Part No. 199144-2



Side handle

Part No. 135269-8



Grease vessel set

for bit

Part No. 194683-7

198993-4 (EU)



Charging Time Reference

40V ^{Li-ion} max	DC40RA	DC40RC
	Fast Charging	
BL4020 2.0Ah	22min	30min
BL4025 2.5Ah	28min	38min
*BL4040 4.0Ah	45min	67min
*BL4050F 5.0Ah	50min	85min

*1 Recommended battery

Cordless Demolition Hammer

HM002G Adapted for SDS-MAX bits

- Variable Speed
- Adapted for SDS-MAX bits
- Constant Speed
- Soft Start
- Built-in Job Light
- Carrying Case

Impact Energy	EPTA-Procedure 05/2009: 20.9 J
Blows Per Minute (BPM)	950 - 1,900
Shank Diameter	18 mm (11/16")
Sound Pressure Level	92 dB(A)
Sound Power Level	103 dB(A)
Vibration Level	Chiselling Function w/ Side Handle: 8.0 m/s ²
Dimensions (L x W x H)	w/ BL4040: 574 x 146 x 324 mm (22-5/8 x 5-3/4 x 12-3/4") w/ BL4050F: 574 x 156 x 344 mm (22-5/8 x 6-1/8 x 13-1/2")
Net weight	12.0 - 13.3 kg (26.5 - 29.3 lbs.)

Standard Equipment : Bull Point, Grease for bit, Side Handle, Wireless Unit (country-specific), Wireless Unit Adapter (country-specific), Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202103