




Cordless Rotary Hammer HR005G 40 mm (1-9/16")



 Adapted for SDS-MAX bits



40V Li-ion max

Impact energy
[EPTA-Procedure 05/2009]

8.0 Joule

As powerful as AC tools




Net weight

7.7 kg

with BL4040

Impact energy
 [EPTA-Procedure 05/2009]
8.0
 Joule

diameter 32mm (1-1/4") / Drilled holes to a depth of 140 mm / Concrete with compressive strength of 40N/mm²

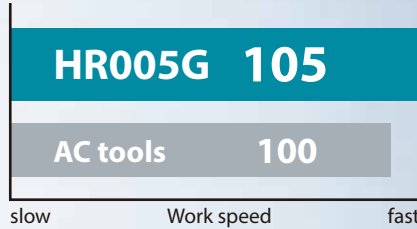

Anti-Vibration Technology

AVT Vibration level at main handle
5.0 m/s²

Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.




SOFT NO LOAD




AFT Active Feedback sensing Technology

turns the motor off if bit rotation is suddenly forced to stop.

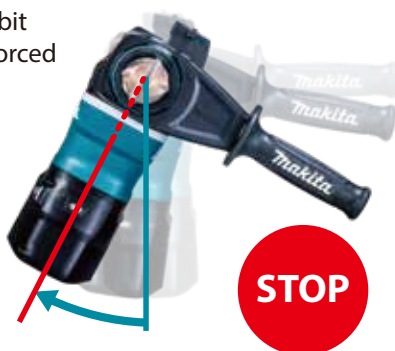

AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

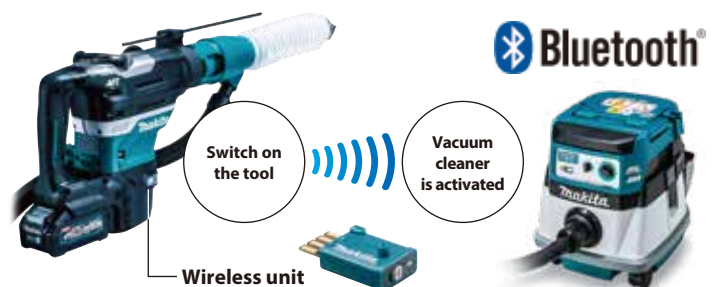

As AC tools



2 mode

Rotation +
Hammering



Hammering

XPT

eXtreme Protection
Technology



Type

Side grip



Side handle



Twin LED job lights



Variable speed
control dial



BL
MOTOR



High Power
Durability
Digital Communication



Rotary Hammer
HR006G



Demolition Hammer
HM002G



Recipro Saw
JR001G

Impact Driver
TD001G

Impact Wrench
TW001G

Driver Drill
DF001G

Hammer Driver Drill
HP001G

Circular Saw
HS003G / HS004G

Angle Grinder
GA003G / GA004G / GA005G /
GA006G / GA007G / GA008G /
GA011G / GA012G / GA013G /
GA014G / GA015G / GA016G

Combination Hammer
HR001G / HR002G /
HR003G / HR004G

Rotary Hammer
HR005G

Portable Power Pack

PDC01

Powered by up to four 18V LXT batteries



PDC1200

Equipped with built-in battery cells



Charger:
DC4001



Charging time:
6hours

**Adapter set
(40Vmax)**

Part No. 191N62-4



Accessories

Dust Extractor Attachment Set


Drilling / Hammering

Part No. 199142-6

Drilling mode



Hammering mode

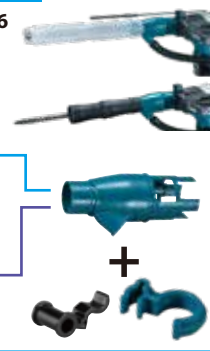


Hammering

without Vacuum hose set

Part No. 199143-4

with Vacuum hose set

Part No. 199144-2

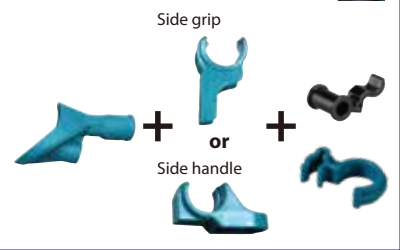

Cordless Rotary Hammer

HR005G 40 mm (1-9/16") Adapted for SDS-Max bits

- Variable Speed
- Brake
- Adapted for SDS-MAX bits
- Torque Limiter
- Constant Speed
- Soft Start
- Dust Collection
- Built-in Job Light
- Carrying Case

Impact Energy	EPTA-Procedure 05/2009: 8 J
Capacity	Concrete (w/ TCT Bit): 40 mm (1-9/16")
Blows Per Minute (BPM)	1,450 - 2,900
No Load Speed (RPM)	250 - 500
Sound Pressure Level	91 dB(A)
Sound Power Level	102 dB(A)
Vibration Level	Hammer Drilling into Concrete: 5.0 m/s ² Chiselling Function w/ Side Grip: 4.0 m/s ² Chiselling Function w/ Side Handle: 4.0 m/s ²
Dimensions (L x W x H)	w/o Battery: 477 x 115 x 286 mm (18-3/4 x 4-1/2 x 11-1/4") w/ BL4040: 500 x 115 x 286 mm (19-3/4 x 4-1/2 x 11-1/4") w/ BL4050F: 520 x 115 x 305 mm (20-1/2 x 4-1/2 x 12")
Net weight	7.4 - 8.2 kg (17.0 - 18.1 lbs.)

Standard Equipment: Side Handle, Side Grip, Depth Gauge, Bit Grease, Cloth, Wireless Unit (country-specific), Wireless Unit Adapter (country-specific), Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.