



Cordless Impact Wrench
TW004G / TW005G 1/2" (12.7 mm)



40V Li-ion max

Max fastening torque

350
N·m

**Compact yet with
Increased max
fastening torque**



TW004G

C ring



TW005G

Pin detent



40Vmax series movie

This movie was filmed in Japan.
Models and specs may vary by country.



XGT
40V **Li-ion**
max

Powered by
 40Vmax XGT Li-Ion
 battery

Increased max fastening torque



BL
MOTOR



Max fastening torque
350
 N·m

Nut-busting torque
630
 N·m

*1 Fastening torque at 6 seconds after seating, when tightening M16 (grade F10T) high strength friction grip bolt in 4 (Max) mode

Auto-stop system available both in forward / reverse rotation modes


3 modes of reaction time for automatic stop available both in forward and reverse rotation modes.



	Forward	Reverse
mode 1	The tool stops automatically as soon as it has detected the first impact blow.	The tool stops automatically as soon as it has stopped impact blow.
mode 2	The tool stops automatically approximately 0.5 seconds after the moment it has detected the first impact blow.	The tool stops automatically approximately 0.2 seconds after the moment it has stopped impact blow.
mode 3	The tool stops automatically approximately 1.0 second after the moment it has detected the first impact blow.	The tool automatically slows down to 300min ⁻¹ after the moment it has stopped impact blow.

Electronic 4 stage impact power selection


Both in forward and reverse rotation modes, max / hard / medium / soft impact power can be selected to suit the material of workpiece or screw type simply by pushing a button.



Full speed mode lamp

Trigger switch with full speed mode

- Variable speed mode can be changed to full speed mode simply by pushing a button.
- Because in full speed mode, the trigger travel is shorter than in variable speed mode, the full speed is quickly reached, reducing hand and finger fatigue from trigger pull.



Compact and High Torque

Compact design with a short overall length of 144mm



High-strength anvil

Double spring

Excellent performance in continuous heavy operation due to Optimum power supply system

Able to use 2 batteries consecutively



Number of bolts consecutively tightened under heavy load*2
approx


560 bolts



*2 Continuous tightening of M16 bolts in an environment with a temperature at 40 ° C / using two BL4025 batteries

Relation Between Fastening torque and Fastening time when tightening each size of bolt in each Fastening torque mode with a fully charged battery.


The time axis on the charts below indicates the fastening time after the bolt is seated.

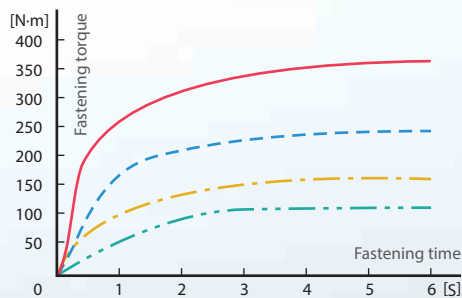

- Max mode (4)**
Tightening M16 (grade: F10T)
High strength bolt in 4: Max mode
- Hard mode (3)**
Tightening M16 High strength bolt in 3: High mode
- Medium mode (2)**
Tightening M14 High strength bolt in 2: Medium mode
- Soft mode (1)**
Tightening M12 High strength bolt in 1: Soft mode

Constant speed control reduces the torque drop when remaining battery capacity gets low.

Twin LED job light



Variable speed control by trigger



XPT



No load speed (min⁻¹)

Max mode (4): 0 - 3,200
Hard mode (3): 0 - 2,600
Medium mode (2): 0 - 1,800
Soft mode (1): 0 - 1,000

Impacts per minutes (min⁻¹)

Max mode (4): 0 - 4,000
Hard mode (3): 0 - 3,400
Medium mode (2): 0 - 2,600
Soft mode (1): 0 - 1,800



Optimum power supply system and Optimum charging system

The XGT range of tools and batteries come with a built-in program, providing digital communication between the battery and tool. Allowing not only for the battery to talk with tool but also the tool to talk to the battery. Battery technology and motor engineering that work together for optimum performance.




Tool ↔ Battery ↔ Battery Charger
Digital communication

Optimum charging system

Auto maintenance system with two cooling fans for providing more optimum fast charging

Built Tough

High durability specifications specially designed for 40Vmax Li-Ion batteries

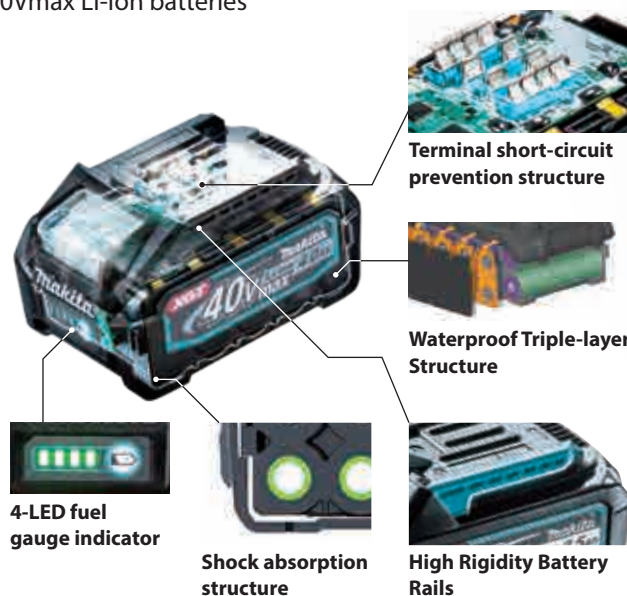

40Vmax Li-ion Battery

BL4025
2.5Ah



BL4040
4.0Ah



40Vmax Fast Charger

DC40RA



The enlarged and raised LED light provides clearer indication of charging status.

Interchangeable Adapter ADP10



Compatible with LXT Li-Ion batteries

Accessories

Tool hanger set
Part No. 191F58-7



Charging Time Reference

Fast Charging	DC40RA	
	28min	BL4025 2.5Ah
	45min	BL4040 4.0Ah

Cordless Impact Wrench

TW004G / TW005G 1/2" (12.7 mm)

Variable Speed	Fastening Capacities	Standard Bolt: M10 - M20 (3/8" - 3/4") High Strength Bolt: M10 - M16 (3/8" - 5/8")
Brake	Square Drive	12.7 mm (1/2")
Reversing	No Load Speed (RPM)	Max / Hard / Mid / Soft: 0 - 3,200 / 2,600 / 1,800 / 1,000
Electronic 4-Speed	Impacts Per Minute (IPM)	Max / Hard / Mid / Soft: 0 - 4,000 / 3,400 / 2,600 / 1,800
Constant Speed	Max Fastening Torque	350 N·m (260 ft.lbs.)
Built-in Job Light	Nut-Busting Torque	630 N·m (465 ft.lbs.)
Carrying Case	Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 16.5 m/s ²
	Sound Pressure Level	99 dB(A)
	Sound Power Level	110 dB(A)
	Dimensions (L x W x H)	w/ BL4025: 144x86x248 mm (5-5/8"x3-3/8"x9-3/4") w/ BL4040: 144x86x253 mm (5-5/8"x3-3/8"x10")
	Net weight	1.9 - 2.2 kg (4.2 - 4.9 lbs.)

Standard Equipment: Belt Clip, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202009