Accessories

Hose

Note: Al though type B hose can be connected with power tools, Front cuffs and Joint are required

for some power tools



B: for cleaning


Size	Length (m)	Туре	with Front cuffs	Part No.
28mm	1.5	А	22,38	A-34235
28mm	2.5	А	22, 24, 38	195437-5
28mm	3.5	А	22, 24, 38	195433-3
28mm	5	А	22, 24, 38	195436-7
38mm	2.5	В	38	195434-1
38mm	5	В	38	195435-9

Straight pipe, Bending pipe, Anchor nozzle set and

Corner nozzle



Nozzle assembly



Туре	Dry/ Wet	Part No.
Universal Type	Dry/ Wet	195551-7
Compact Type A	Dry	195549-4
Compact Type B	Wet	195550-9
Wide Type	-	A-47846

Holder set 10-33





Cleaning set

-Straight pipe

-Bending pipe -Nozzle assembly





195439-1

Front cuffs & Joint



Туре	Part No.	
Front cuffs 22	195547-8	
Front cuffs 24	195546-0	
Front cuffs 38	195545-2	
Joint 22-38	195548-6	

Filter set









Powder filter set	Prefilter set	Cloth filter	Filter set (for water)
Part No.	Part No.	Part No.	Part No.
*197166-6	195553-3	140248-3	195555-9





Poly bag set



Per pkg.	Part No.
10	195432-5

Filter bag set

(5pcs/set)



195557-5

Corded and Cordless Vacuum Cleaner DVC860L (Wet & Dry / Cloth filter type) DVC861L (Only Dry / HEPA filter)



AC:320W DC:25-70W AC: 3.6m³/min DC: 2.1m³/min Max sealed suction AC: 24kPa DC: 9kPa 366x334x368mm $(L \times W \times H)$ (14-3/8"x13-1/8"x14-1/2")

DVC860L (BL1820x2): 8.6kg (19.0lbs) DVC860L (BL1850Bx2): 9.2kg (20.3lbs) DVC861L (BL1820x2): 9.3kg (20.5lbs) DVC861L (BL1850Bx2): 9.9kg (21.8bs) Power supply cord 5.0m (16.4ft)


Fast charger, Battery cartridge, Connection cord, Tool box, Hose complete, Poly bag set, Straight pipe, Bending pipe, Corner nozzle, Nozzle assembly, Front cuffs (DVC861Lonly)

*weight according to EPTA-Procedure 01/2003 Items of standard equipment and specifications may vary by country or area

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201510

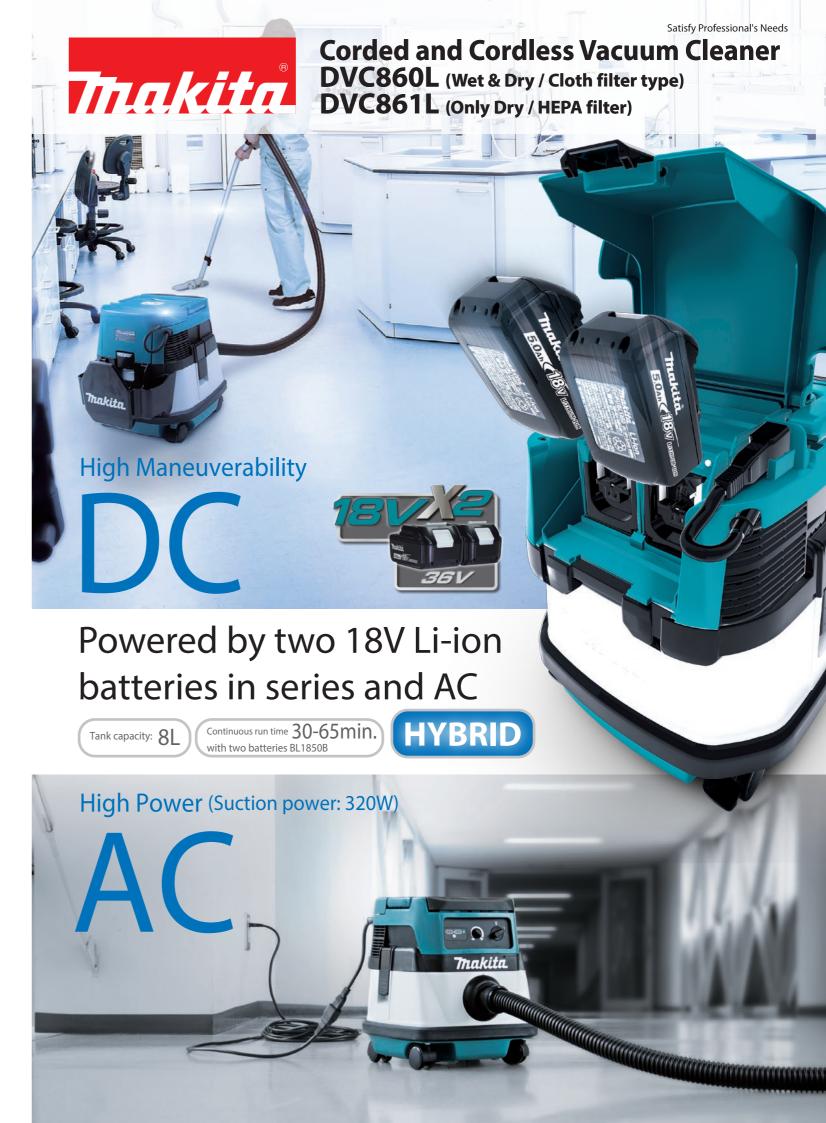





Suction power

70 w

Max air flow

 $2.1 \, \text{m}^2/\text{min}$

Max sealed suction **9.0** kPa








On DC power + On AC power



Max air flow $\pmb{3.6}\,\text{m}^2\text{/min}$ Max sealed suction **24.0** kPa







Removable power supply



Continuous run time

On a single full battery charge: minute

On a single full battery charge: minute				
Battery		BL1850B [5.0Ah]	BL1840B [4.0Ah]	BL1830B [3.0Ah]
Run time	High	30min.	25min.	20min.
	Low	65min.	50min.	40min.
Charging ti	me			
DC18RD		45min.	36min.	22min.
DC18RC	The state of the s	45min. × 2	36min. × 2	22min. × 2
DC18SD		110min. ×2	90min. $ imes$ 2	60min. × 2





Large on-off switch

• allows for easy on/off switching. • functions only when Main power switch is on to prevent accidental switch-on during transportation, etc.



Dual battery fuel gauge



Variable suction power control by dial



Caster stopper



Removable storage box



On-tool pipe storage

