

Optional Accessories




Wheel cover

Type	Part No.
For Model GA4030	
-	135238-9
Toolless	-
For Model GA4530	
-	135245-2
Toolless	135247-8
For Model GA5030	
-	135240-2
Toolless	135242-8




Dust collecting wheel guard
(For dust collection)
*Economy type

Type	Part No.
For Model GA4030	
A	192475-8
For Model GA4530, GA5030	
A	192618-2
B (W/O Joint)	192972-4
B (W/ Joint)	192968-5
B (W/ Joint)	*193794-5

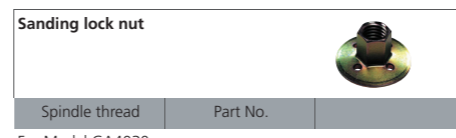


Sanding lock nut

Spindle thread	Part No.
For Model GA4030	
M10 x 1.5	224502-4
For Model GA4530, GA5030	
M14 x 2 (DIN)	224515-5
5/8"	224517-1
M16 x 2	224523-6

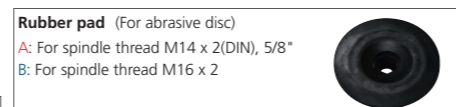

Rubber pad (For abrasive disc)
A: For spindle thread M14 x 2(DIN), 5/8"
B: For spindle thread M16 x 2

Outer dia.(mm)	Type	Part No.
For Model GA4030		
76	-	743009-6
For Model GA4530		
100	A	794187-5
100	B	743036-3
For Model GA5030		
115	-	743015-1

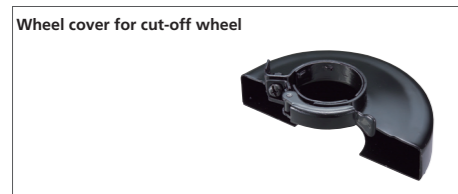


Wheel cover for cut-off wheel

For Model	Part No.
GA5030	135270-3




Wheel cover for wire cup brush

For Model	Part No.
GA4030	192454-6
GA5030	193066-8

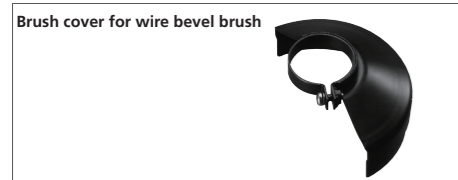


Brush cover for wire bevel brush

For Model	Part No.
GA4030	192412-2

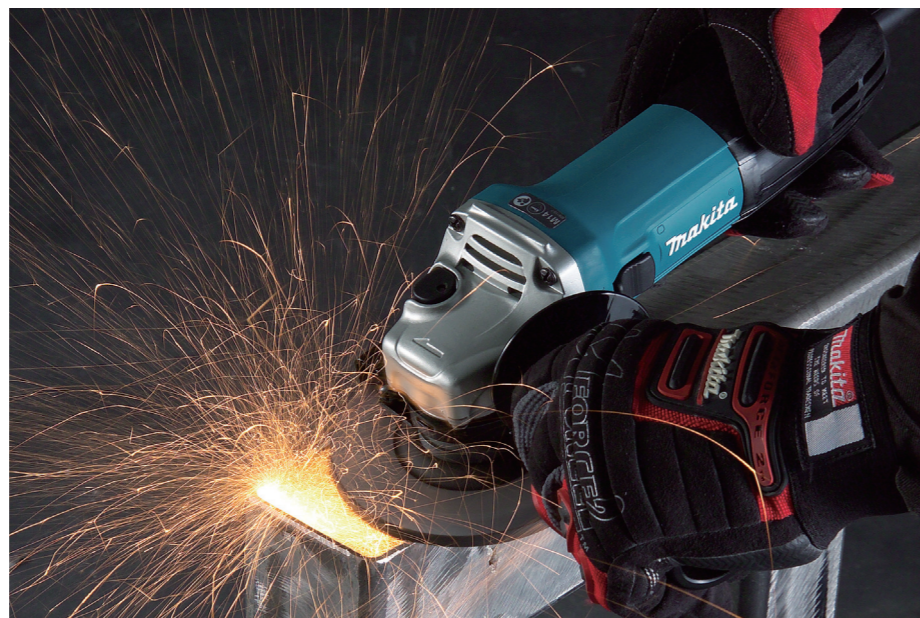

Angle Grinder GA4030 100mm (4") / GA4530 115mm (4-1/2") / GA5030 125mm (5") 459



Double Insulation



	GA4030	GA4530	GA5030
Continuous rating Input	720W	720W	720W
Capacity Depressed center wheel :	100mm (4")	115mm (4-1/2")	125mm (5")
No load speed (rpm)	11,000	11,000	11,000
Dimensions (L x W x H)	266x 117 x 95mm (10-1/2" x 4-5/8" x 3-3/4")	266 x 128 x 103mm (10-1/2" x 5" x 4-1/16")	266 x 138 x 103mm (10-1/2" x 5-7/16" x 4-1/16")
*Net weight	1.7kg (3.7lbs)	1.8kg (4.0lbs)	1.8kg (4.0lbs)
Power supply cord	2.5m (8.2ft)	2.5m (8.2ft)	2.5m (8.2ft)

Standard Equipment Depressed Centre Wheel, Lock Nut Wrench, Side grip *weight according to EPTA-Procedure 01/2003, including Wheel cover, Inner flange, Lock nut, Side grip; without Power supply cord

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23420-2 AJ-AD



Angle Grinder

GA4030 100mm (4") / GA4530 115mm (4-1/2") / GA5030 125mm (5")


SLIM and DURABLE



Ergonomically best possible gripping

achieved by the ingenious design of motor housing, rear cover and side grip:

- 1 Slim motor housing with a small circumference of 179mm
- 2 Motor housing and rear cover ergonomically and uniquely ribbed for sure and comfortable gripping
- 3 Rear cover ergonomically tapered for easy gripping
- 4 Ergonomic 20° side grip angle

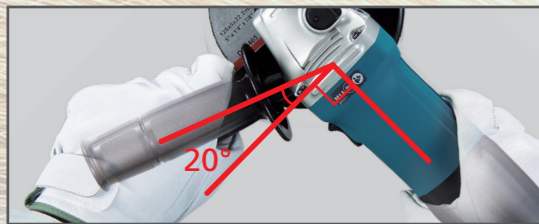


The angle of side grip to gear housing has been increased from conventional 10° for easier handling.

Anti-vibration grip (Optional accessory)





Very comfortable in any gripping way

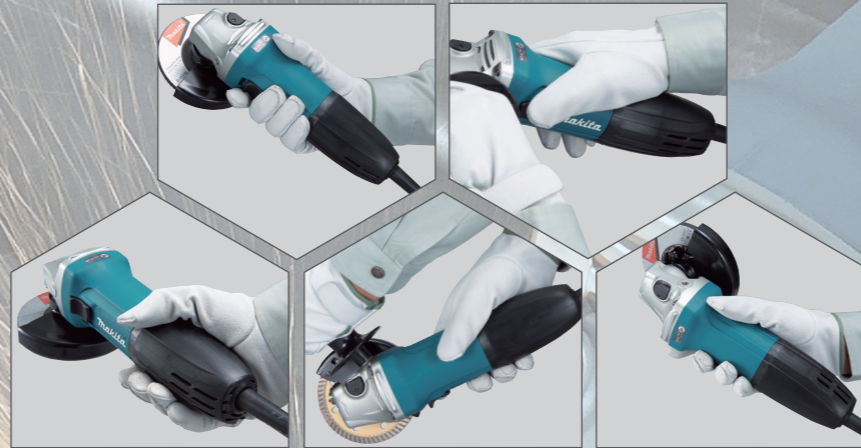

Extra-high reliability and durability

- 1 High quality motor with excellent heat-resistance
- 2 Reliable machined bevel gears
- 3 Protection against dust
 - Dust-proof ball bearings
 - Motor field coated with protective powder varnish
 - Two Labyrinth rings seal the ball bearings and entirely protect the gears and the motor from dust and dirt.

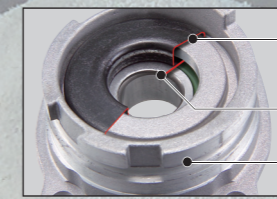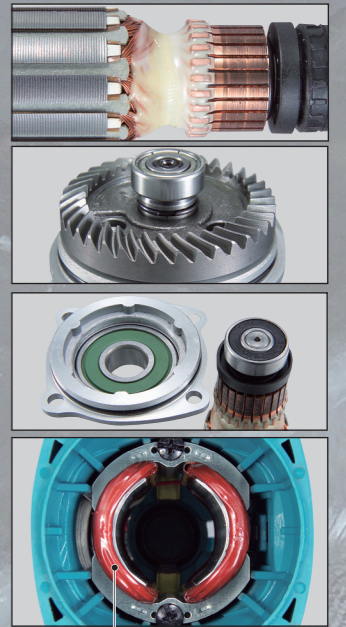

Labyrinth ring
Flat washer
Bearing box



Powder varnish
Labyrinth rubber ring



Photo: GA4530

Small gear housing

Slide switch conveniently located for one hand operation

Toolless wheel cover



Angle grinder

GA4030 100mm (4")

GA4530 115mm (4-1/2")

GA5030 125mm (5")

Powerful
720 W