

Accessories

For UR013G

Chisel blade
Part No. 199872-9
Blade dia.: 225mm



Protector 225 set MG
Part No. 1911Y0-3



Shredder blade
Part No. 199874-5
Blade dia.: 270mm



Protector set MG
Part No. 1911Y1-1



Brushcutter blade

Blade dia	2-tooth blade	3-tooth blade	4-tooth blade
255mm	198345-9	195299-1	196895-8

Plastic blade

Cutting width	Plastic blade Set	Replacement plastic blade
305mm	199868-0	199870-3

Trimmer head
Part No. 199884-2
Cord/Line: 2.7mm
Ref.: 105-M10L



Protector 225 set MG
Part No. 1911Y2-9
Cord/Line: 2.7mm
Ref.: 121-M10L



For UR014G

Trimmer head
Part No. 1911Y3-7
Cord/Line: 2.7mm
Ref.: 121SP
Spline-engaged with the sleeve of Cutter shaft



Shoulder strap assembly Comfort
Part No. 122A37-4



Shoulder strap assembly Single
Part No. 127759-5



UR013G, UR014G

Four-leaf Spiral Nylon cord

Red	Size	Part No.
	2.7mmx15m	E-01828
	2.7mmx30m	E-01834
	2.7mmx180m	E-01840

Charging Time

	Fast Charging	
	DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min
BL4025 2.5Ah	28 min	38 min
BL4040 4.0Ah	45 min	67 min
*1BL4050F 5.0Ah	50 min	85 min
*1BL4080F 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Grass Trimmer

UR013G / UR014G

	UR013G	UR014G	
Variable Speed	Cutting Width	Metal blade: 255 mm (10") Chisel blade: 225 mm (8-7/8") Nylon Cutting Head: 450 mm (17-3/4")	- - 450 mm (17-3/4")
	Brake	Shredder blade:	270 mm (8-7/8")
		Plastic Blade:	305 mm (12")
	Reversing (UR014G only)	No Load Speed (RPM)	Metal blade: 3,500-6,700 Nylon Cutting Head: 3,500-5,000
Soft Start		Spindle size	M10 x 1.25 LH
Constant Speed	Dimensions (L x W x H)	1,863 x 690 x 546 mm Tool only (73-1/2 x 27-1/4 x 21-1/2")	1,857 x 330 x 304 mm (73 x 13 x 12")
	Soft Start		1,966 x 690 x 546 mm (77-1/2 x 27-1/4 x 21-1/2")
Net weight		w/ Nylon cutting head and BL4080F:	5.9 - 7.2 kg (13.0 - 15.9 lbs.)

Standard Equipment: Metal blade (UR013G only) / Nylon cutting head / Plastic blade (UR013G only), Tool cover (UR013G only), Accessory bag, Hex wrench, Box driver, Shoulder belt, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202302



UR013G



UR014G

Exclusively for use with nylon cutting head, with Reverse rotation mode



Max Output
1.5 kW (with BL4080F)

High power as 35cc engine tool



High output power




BL MOTOR

Max Output
1.5 kW
(with BL4080F)

AFT

Active Feedback sensing Technology

Torque limiter turns the motor off if the tool is suddenly forced to lock

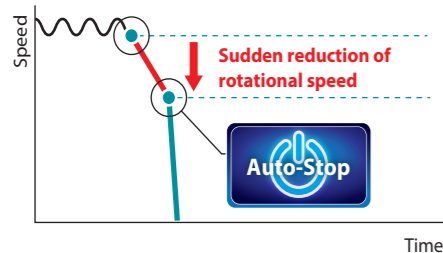

High-torque mode

- Applicable to heavy duty operation.
- Recommended for heavy-duty operation where particularly high torque is required, such as shredding operation.

Low noise

Model UR013G (w/ Plastic blade) **95 dB(A)**

Model UR014G (w/ Nylon cutting head) **93 dB(A)**

Guaranteed value according to European Outdoor Noise Directive 2000/14/EC (with the blade which generates the highest noise levels)

Run Time

Model UR013G **81-11 min**

Model UR014G **51-18 min**

Low speed - Max. speed



with Nylon cutting head and BL4050F on a single full battery charge / No load

IPX4-compatible



Enhanced Dust and Drip-proof Performance

Multi functional control panel: near right hand position for easy access and operation

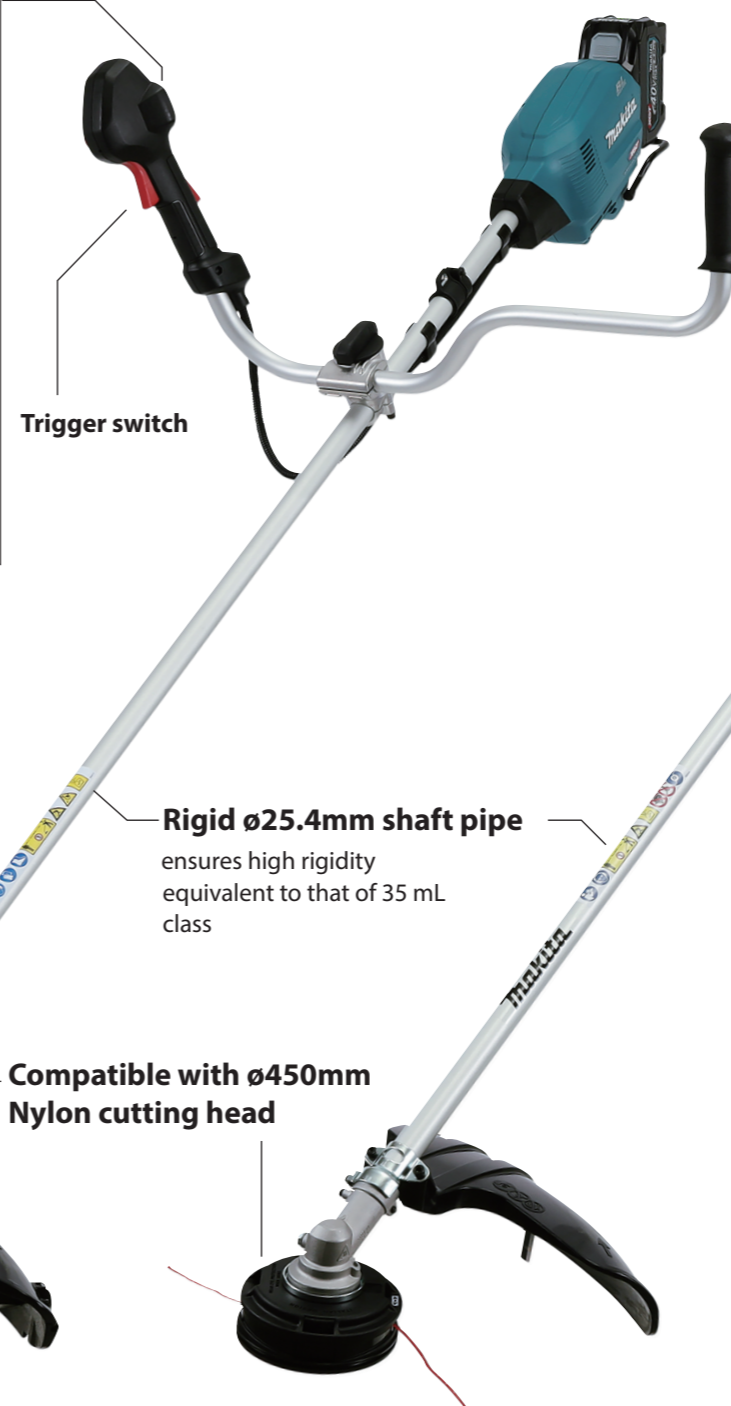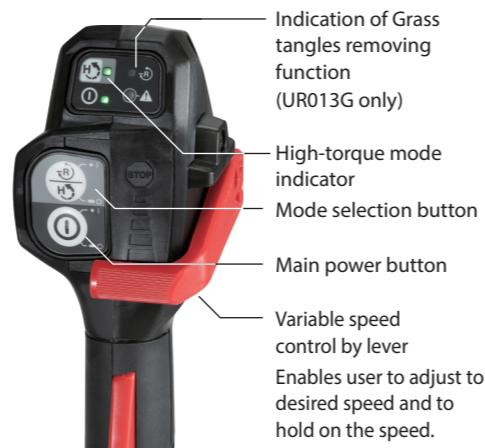

UR013G

Offset bike Handle

UR014G

Loop-Handle

Exclusively for use with nylon cutting head



UR014G only

Reverse rotation mode



Indication of Reverse rotation function

- Counterclockwise blade rotation/ Clockwise blade rotation can be selected to suit the user's preferences or needs; for example, when he/she desires to control the scattering direction of grass clippings in such an operation as cutting a lawn beside driveway (with memory function).
- Press and hold the mode selection button for Counterclockwise blade rotation/ Clockwise blade rotation (with memory function).

Counterclockwise blade rotation




Clockwise blade rotation



UR013G only

Tool-less handle angle adjustment

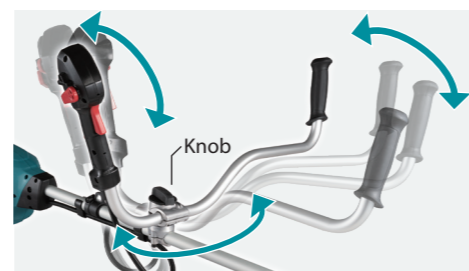


Left/right separate type bike handle

Shredder blade/ Chisel blade can be used.



Grass tangles removing function

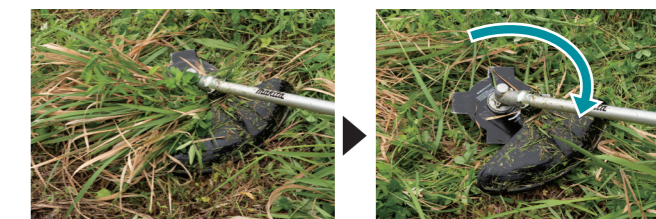

Reverse rotation or Grass tangles removing function