

VS001G

Cordless Vacuum Sweeper

1. Capable of cleaning dust or waste of all sizes
2. Dust container capacity 24L

Dust pickup rate
about
90%

Cleaning width with Side brush
650 mm



**Air volume comparable to
28cc-class engine models**

Accessories

Flat nozzle set
Part No. 1916V7-8



Gutter nozzle set
Part No. 191B03-8



Adapter pipe 80-72 set
Part No. 191L13-5



For connecting the gutter nozzle set

Vacuum kit set
Part No. 1916T9-0



Capacity: 50 L

Dust bag set
Part No. 191P40-6



Capacity: 25 L


Charging Time

	Fast Charging	
	DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min
BL4025 2.5Ah	28 min	38 min
BL4040 4.0Ah	45 min	67 min
^{*1} BL4040F 4.0Ah	45 min	67 min
^{*1} BL4050F 5.0Ah	50 min	85 min
^{*1} BL4080F/H 8.0Ah	76 min	170 min

^{*1} Recommended battery

Cordless Blower	
UB003G	
Variable Speed	
Brake	
Anti-restart function	
Constant Speed	
Blower function	Max blowing force: 7 / 16N Max air volume: 9.4 / 13.8 m ³ /min (332 / 487 CFM) Max air velocity: 0 - 46 / 68 m/s (0 - 103 / 152 MPH) Avg. air velocity: 0 - 38 / 56 m/s (0 - 85 / 125 MPH) Continuous use: 30 / 9 min
(Battery)	BL4050F
Vacuum function	Max air volume: 13.0 m ³ /min (459 CFM) Max sealed suction: 3.3 kPa Dust bag capacity: 50 L (13.2 gal) Continuous use: 30 / 9 min
(Battery)	BL4050F
Sound pressure level	86.8dB(A) (EN IEC 62841-4-6)
Sound power level	97.3dB(A) (EN IEC 62841-4-6)
Uncertainty (K) for Noise	1.7 dB(A) (EN IEC 62841-4-6, Sound pressure level), 1.8 dB(A) (EN IEC 62841-4-6, Sound power level)
Vibration level	2.0m/s ² (EN IEC 62841-4-6)
Uncertainty (K) for Vibration	1.5m/s ² (EN IEC 62841-4-6)
Dimensions (L x W x H)	699 - 830 x 201 x 400 mm (27-1/2 - 32-3/4 x 7-7/8 x 15-3/4")
(Attachment)	With the blower nozzle at shortest to longest, w/o the vacuum kit
Net weight	5.0 - 6.1 kg (11.0 - 13.4 lbs.)
(Battery)	BL4050F
(Attachment)	Min: with the blower pipe and nozzle, Max: with the vacuum kit
Standard Equipment : Flat nozzle, Vacuum kit, Band assembly, Hex wrench, Battery, Charger	

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual. Items of standard equipment and specifications may vary by country or area.

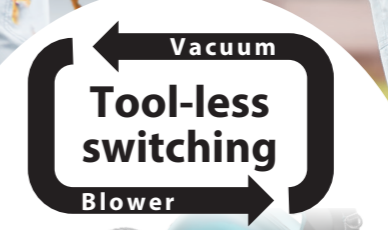

Blowing	
Max air volume	13.8 m³/min
Max air velocity	68m/s 56m/s (Average)

Vacuuming	
Max air volume	13.0 m³/min
Max sealed suction	3.3 kPa

Tool-less switching between blower and vacuum



Delivers blower and vacuum air volume comparable to 28cc-class engine models, with tool-less switching between blower and vacuum modes


Insert. Rotate. Lock with one touch.



Before vacuuming



After vacuuming

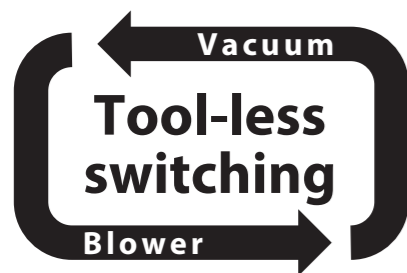

Air volume is adjustable from gentle to strong.

Cruise control lever
reduces finger fatigue during continuous use.

Mode switch button
provides tactile feedback for quick switching.

Clear click feedback

Low mode
High mode

Cruise control lever
Trigger operation is also available.

High water-resistance compatible with XPT

eXtreme Protection Technology **XPT**

Continuous run time on a full battery charge

	With BL4080F battery	With BL4050F battery
Low mode	About 45 min	About 30 min
High mode	About 15 min	About 9 min

