

■ Also available
Concrete Vibrator series

VR001G Tool only
without Flexible shaft
Flexible shafts from ø28 to ø38
are suitable for a wide range of
jobsites



VR003G
with Flexible shaft ø32

ø32-1.2m/ø32-1.7m or ø32-2.4m



VR004G
with Flexible shaft ø38

ø38-1.2m or ø38-2.4m



■ Accessories
Screed Blade



Battery case



	Working width	Part No
Blade 900	900mm	1917D5-2 / 1918L1-2
Blade 1400	1,400mm	1917D4-4 / 1918L0-4
Blade 1800	1,800mm	1917D3-6 / 1918K9-9

	Compatible battery	Part No
Battery case L set	BL4050F / BL4080F / BL4080H	1910J1-0 / 1910J2-8
Battery case H set	Portable power pack PDC1200 / PDC1500	1910J4-4 / 1910J5-2

■ Charging Time

40V Li-ion max	Fast Charging	
	DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4040/F 4.0Ah	45 min	67 min
*1 BL4050F 5.0Ah	50 min	85 min
*1 BL4080F/H 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Screed VL001G	
Anti-restart function	Working width 900 / 1,400 / 1,800 mm (35-1/2 / 55 / 71")
Constant Speed	Vibrations per minute 11,000 min ⁻¹
Toolless blade change	Continuous use (Battery) (Attachment) 150 min. (BL4040F) (Blade: 1,800 mm)
	Vibration level 8.6 m/s ² (EN IEC62841-1)
	Uncertainty (K) for Vibration 1.5 m/s ² (EN IEC62841-1)
	Sound pressure level 85 dB(A) (EN IEC62841-1)
	Sound power level 91 dB(A) (EN IEC62841-1)
	Uncertainty (K) for Noise 3 dB(A) (EN IEC62841-1)
	Dimensions (L x W x H) 1,562 x 935 / 1,435 / 1,836 x 258 mm
	(61-1/2 x 36-3/4 / 56-1/2 / 72-1/4 x 10-1/8")
	(W: Blade, 900 / 1,400 / 1,800 mm)
	Net weight (Battery) 5.3 / 5.6 / 6.2 kg (11.7 / 12.4 / 13.7 lbs.) (BL4040F)
	(Attachment) (Blade: 900 / 1,400 / 1,800 mm)

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202604




www.makita.com

Makita Cordless Screed VL001G

XGT
40V Li-ion max

Excellent maneuverability
for efficient concrete finishing

Covers large work areas

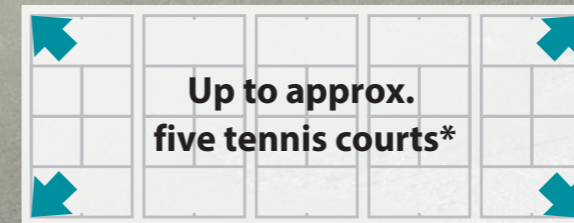

* When screeding at approx. 10 seconds per meter, with 1,400 mm blade and BL4040 battery

Runtime*1

With BL4040F, Blade1800

About 150 min

*1 On a full battery charge

Lightweight

at 6.2 kg

With BL4040F, Blade 1800

Three screed blade lengths for a wide range of job sites and applications

Screed Blades (Optional accessory)

	Working width
Blade 900	900mm
Blade 1400	1,400mm
Blade 1800	1,800mm



Lightweight. Stable. Efficient.


Lightweight design and stable vibration for smooth finishing and tamping.




Powerful, stable vibration
Vibrations per minute:
11,000 VPM

High-power brushless motor
BL MOTOR

Constant speed control
maintains stable vibration at low battery levels

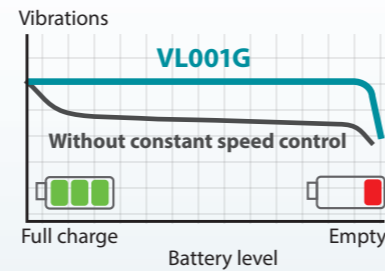

Tool-less installation and removal
Simply insert the shaft tip into the blade, then turn the lock lever.

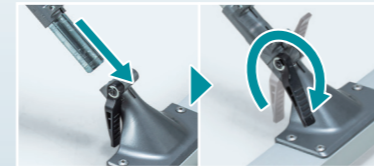

Three blade options to suit different site sizes and applications, from exterior concrete work to residential foundations. (Optional accessory)



Large work area



Small work area



Working width
1,800 mm

Working width
1,400 mm

Working width
900 mm



Lightweight

at **6.2 kg**

With BL4040F,
Blade 1800

Designed to reduce operator fatigue and strain.

Vibration level

8.6 m/s²

Long rubber grip

The wide rubber grip helps reduce vibration transmitted to the hands, even when the operator changes grip positions to suit the task.



Concrete placement process (example)




Unloading fresh concrete



Spreading the concrete



Compacting with a vibrator

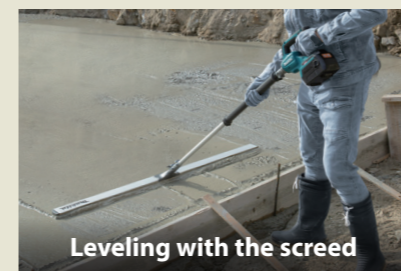

Leveling with the screed




Surface finishing



Completed after curing

Reduces uneven concrete strength and cracking


The vibrating blade settles the aggregate and brings cement paste evenly to the surface, helping minimize variations in strength and reduce cracking.

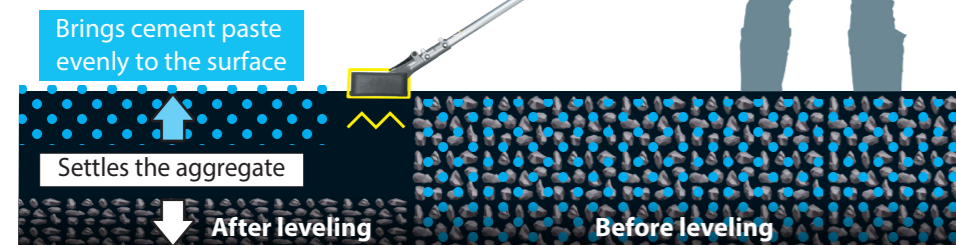

The blade is washable.



Protection against concrete intrusion

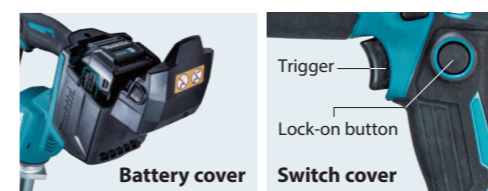

Low battery indicator



Compact loading

The tool body and blade can be easily attached and removed without tools for space-saving loading and transport.



Water-resistance compatible with XPT



(eXtreme Protection Technology)

