

AC 2,200W high performance portable cut-off

M2403

Vertical handle



Cutting Capacity

Cutting angle	90°	45°
		ø127mm (5")
Cross section of workpiece 	H x W: 102 x 194mm (4" x 7-5/8")	H x W: 115 x 103mm (4-1/2" x 4-1/16")
	H x W: 70 x 233mm (2-3/4" x 9-1/8")	
D: Diameter W: Width H: Height S: Side T: Thickness 	H x W: 119 x 119mm (4-11/16" x 4-11/16")	H x W: 106 x 106 (4-3/16" x 4-3/16")
	S x S: 137 x 137mm, T: 10mm (5-3/8" x 5-3/8", 3/8")	S x S: 100 x 100mm, T: 10mm (4" x 4", 3/8")


Horizontal handle (for M2402 only)



Adjustable guide plate with 3 settings

provides three angle settings up to 45 degrees left and right with stops at 15 and 30 degrees.

Quick release vise

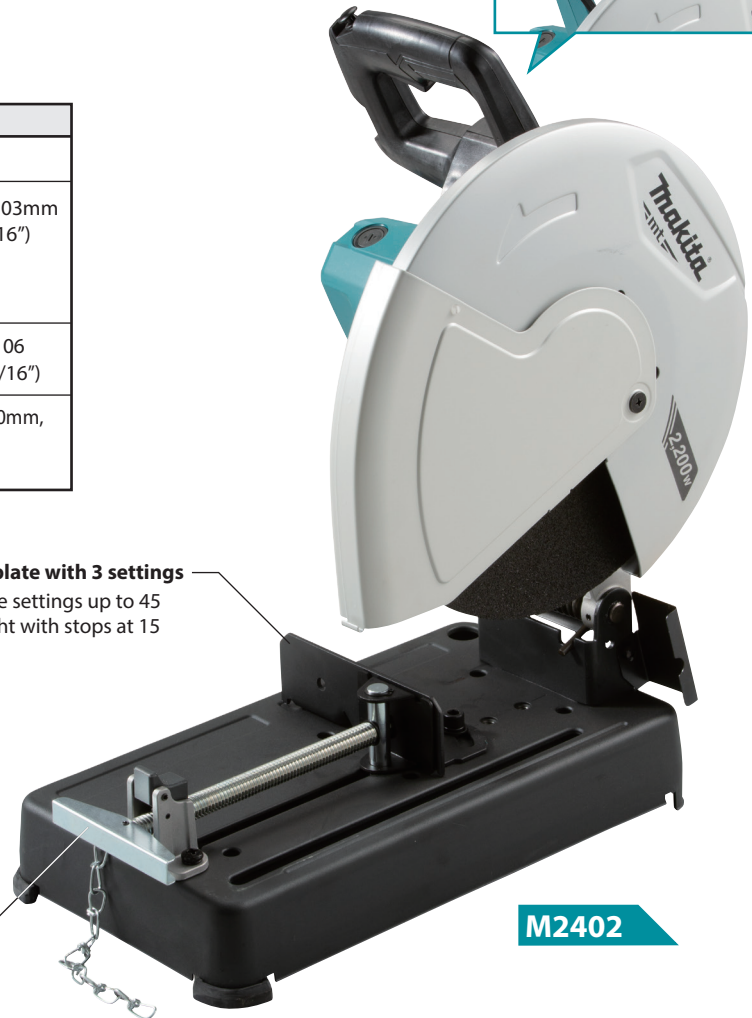

M2402



Portable Cut-off

M2402 / M2403 355 mm (14")

203

Double Insulation

Continuous rating input	2,200W
Wheel Diameter	355 mm (14")
Wheel Arbor	25.4 mm (1")
Wheel Thickness	3 mm (1/8")
No Load Speed (RPM)	3,800
Vibration Level	M2402: 4.5 m/s ² M2403: 3.5 m/s ²
Sound Pressure Level	M2402: 98 dB(A) M2403: 99 dB(A)
Sound Power Level	M2402: 108 dB(A) M2403: 109 dB(A)
Dimensions (L x W x H)	M2402: 490x280x610mm (19-1/4"x11"x24") M2403: 500x280x620mm (19-3/4"x11"x24-3/8")
Net weight	M2402: 14.5 kg (32.0 lbs) M2403: 14.3 kg (31.5 lbs)
Power supply cord	2.0 m (6.6 ft)

Standard Equipment:
Abrasive Cut-Off Wheel, Hex Wrench

Weight according to EPTA-Procedure 01/2014

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202010