



Hole on the bottom of housing for hanging the machine

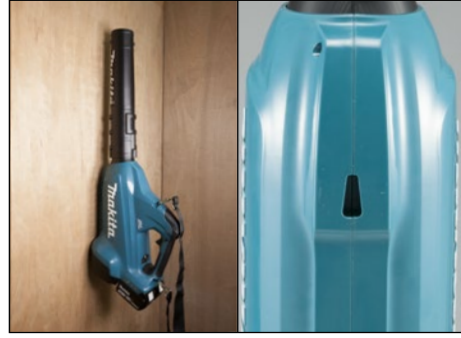

Dual battery fuel gauge

indicates the power remaining in each battery individually in 3 LED stages.

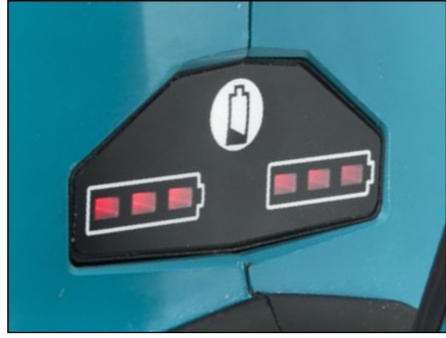

Shoulder belt



18V
Lithium-ion
LXT

Powered by two 18V Li-Ion batteries in series

18V X2
36V

5.0Ah BL1850 4.0Ah BL1840 3.0Ah BL1830
2.0Ah BL1820 1.5Ah BL1815W

140+ TOOLS

Expand Your Lithium Line Up

Product availability and specifications may vary by country or area.



Cordless Blower		DUB362
Variable Speed		<p>Air volume 6.9-13.4m³/min</p> <p>Air speed 27-54m/s</p> <p>No load speed (rpm) 11,400-21,500</p> <p>Sound power level** 96dB(A)</p> <p>Vibration level 0.3m/s²</p> <p>Dimensions (L x W x H) 830-930x205x295mm (32-3/4"-36-5/8"x8-1/8"x11-5/8")</p> <p>Net weight* 3.5kg (7.7lbs)</p>
Standard Equipment: Fast charger, Battery cartridge, Nozzle, Shoulder belt		
<small>*Weight according to EPTA-Procedure 01/2003</small>		
<small>**Items of standard equipment and specifications may vary by country or area.</small>		

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BF-AF

Makita

Cordless Blower
DUB362

Satisfy Professional's Needs

LXT
LITHIUM-ION

Powerful, Lightweight
and very Low noise
level Blower



Low noise:
96 dB
Sound power level

Max air volume:
13.4
m³/min

18V X2
36V

BL
MOTOR

The most powerful Cordless blower (Blower function only)

Excellent handling and comfortable operation by excellent balance



XPT
EXTREME PROTECTION TECHNOLOGY



For use in outdoor applications or harsh environments, protection from dust and dripping water is enhanced.

6-stage air volume/velocity selection just by adjusting dial.



Lock-on button operable from both side

Best grip angle and a nozzle angle for efficient sweeping operation.



BL
MOTOR



3-stage telescopic long nozzle with an adjustment range of 100mm (4")



Lightweight
3.5kg (7.7lbs)
[with 2.0Ah battery]

Powered by two battery system in series

- Two 18V Li-ion batteries can be directly installed on the machine to supply more energy to the powerful 36V DC motor drive system.



Continuous run time (approx) on a single full charged battery

(min)

dial	BL1815N x2	BL1820 x2	BL1830 x2	BL1840 x2	BL1850 x2
1	24	33	44	61	75
2	13	18	25	34	42
3	9	12	16	23	28
4	6	9	12	17	20
5	5	7	9	13	16
6	4	5	6.3	9.3	11.4
Charging time	15	24	22	36	45


Two Port Multi Fast Charger



DC18RD


Longer runtime

Longer runtime compared to the competitors. (based on the same air volume and velocity)

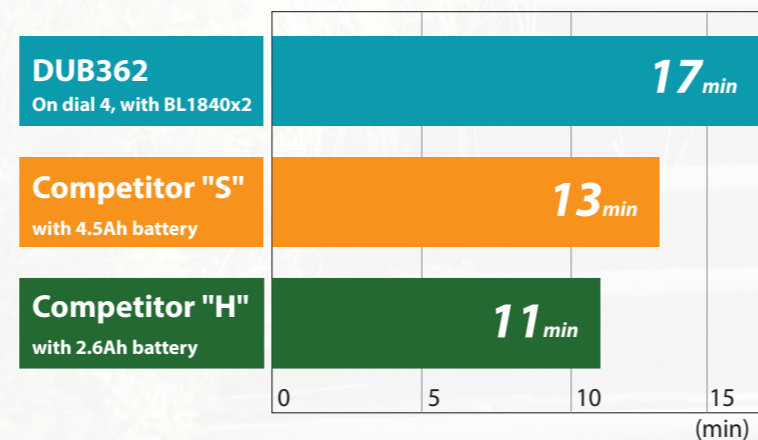

Reduced noise level

- Makita DUB362 features:
- 3 blade fan to reduce noise level without losing air volume and velocity
 - Double housing structure to minimize the noise level
 - Additional sponge inside the housing to absorb the noise level

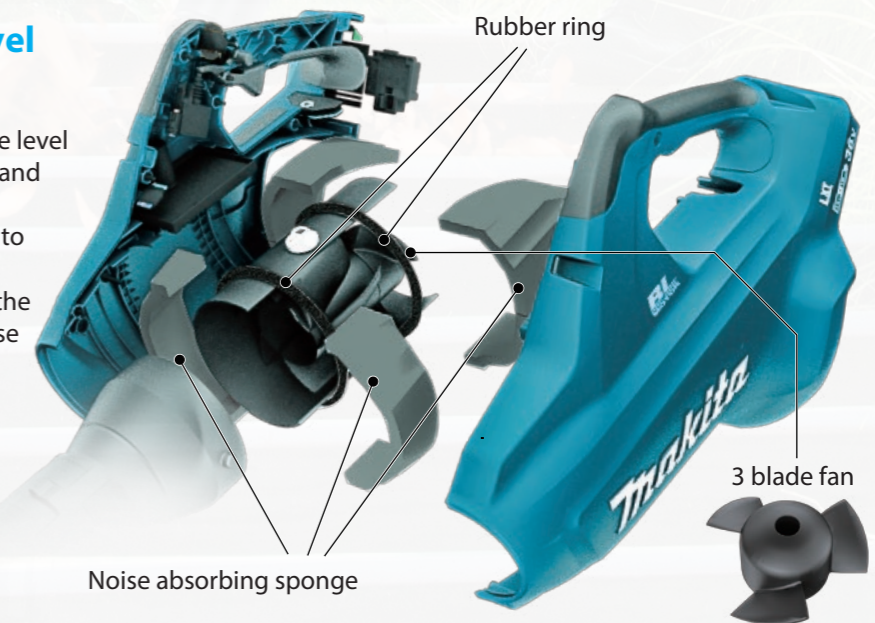

Noise absorbing sponge

Rubber ring

3 blade fan